


Installation Notes

1 Route the cable through the ceiling


Select a rubber ring that fits the network cable size. Refer to the figure on the back of the adapter plate for details.

Route the network cable through the rubber ring, and waterproof the network cable with the jacket or tape.

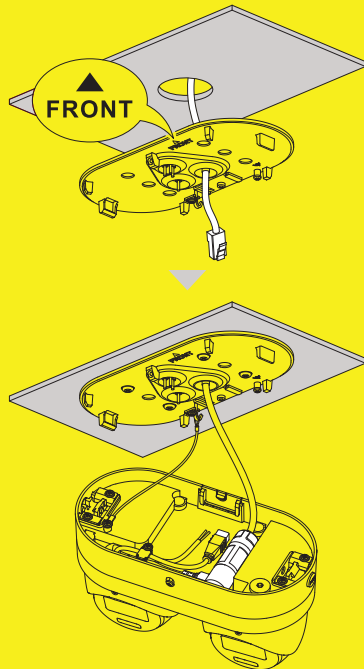

2 Route the cable through the side outlet




Select a conduit joint according to the actual size of the conduit.

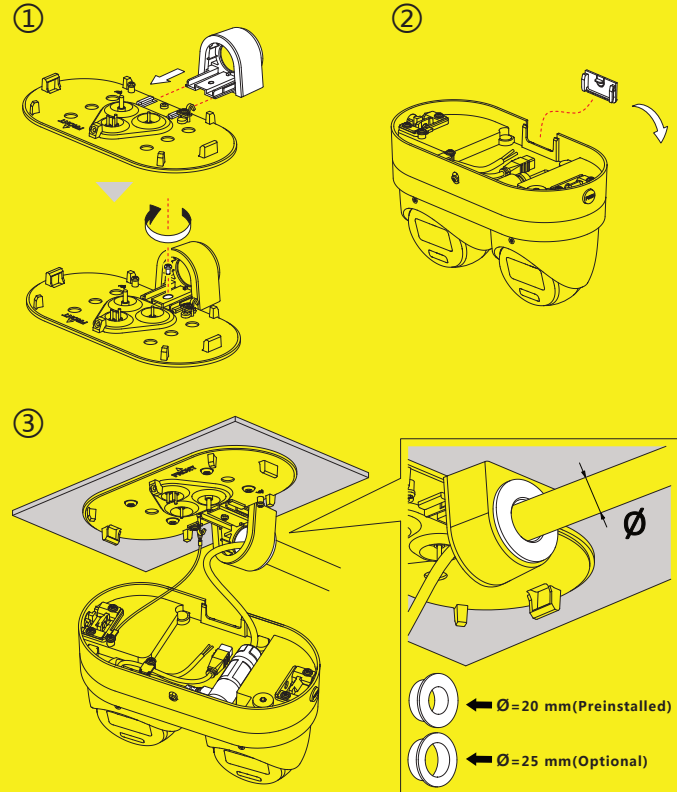

* Product appearance is for reference only and may differ from the actual product.



3 Install the device

Press the device onto the adapter plate, and when you hear "click", fix the device and the adapter plate with screws.

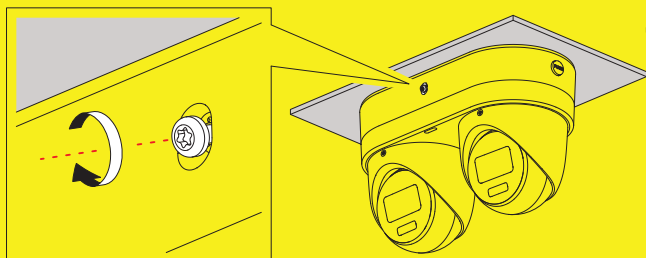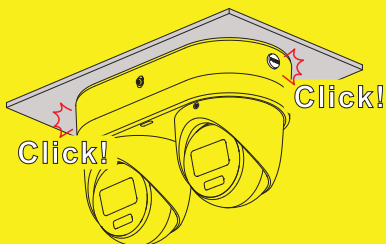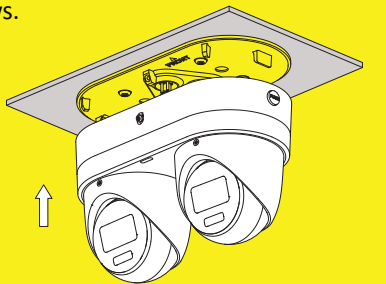

4 Adjust the device angle

Loosen the locking screws and adjust the device angle, and tighten the locking screws when it is adjusted to the desired viewing angle.

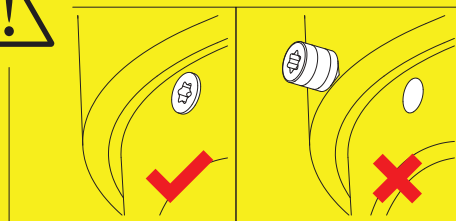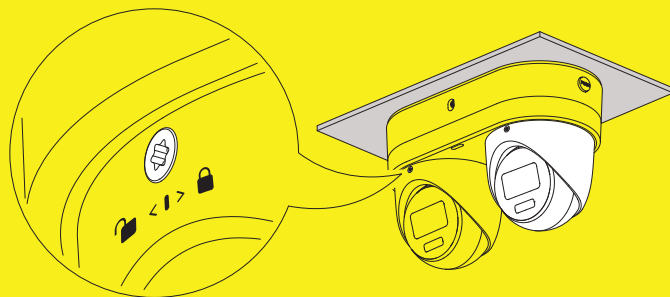

Note: Do not fully unscrew the locking screws !

5 Adjust the preview image

- ① Click  or  to switch between 2.8 mm and 4 mm lenses.
- ② Click , or , or  on the web page to make the image clear.

UD41817N-C