


CODE: **AWO510PU v.1.8/V**
 NAME: **17/40/M-F/PUSTA**

EN

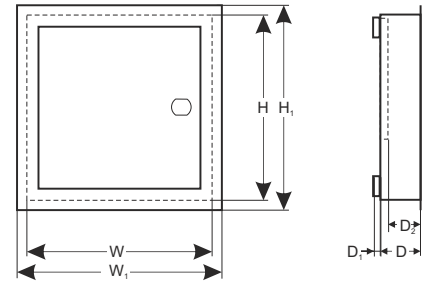

DESTINATION

DSC:

Power Series Neo

Alarm control panels: HS2016, HS2016-4, HS2032, HS2064, HS2128.

Modules: HSM2300, HSM2204, HSM2208, HSM2108, PCL-422

Power Series

Alarm control panels: PC1616, PC1832, PC1864.

Modules: PC5320, PC5100, PC5108, PC4216, PC5200, PC5204, PC5400, IT-100.

Power Series Pro

Alarm control panels: HS3032, HS3128, HS3248.

Modules: HSM3408, HSM2108, HSM3204CX, HSM3350, AMX-400.

EBS:

Alarm control panels: PX 202A

PARADOX:

Alarm control panels: 728 ULT, E55, 65, SP4000, SP5500, 6000, 7000, EV048, 192.

Modules: ZX4, ZX8, ZX8SP, APR3- HUB2, PGM4.

PYRONIX:

Alarm control panels: MATRIX 424, 6/816, 832, 832+

RISCO:

Alarm control panels: PRO24, 116, 128, 140.

Modules: RP296EPS

ROEL:

Alarm control panels: SIGMA 6,12, CERBER

ROGER:

Alarm control panels: PR402, CPR 32- SE

SATEL:

Alarm control panels: Integra 32, 24, 64, 128, 128+, 256+, Versa 5, 10, 15 Plus, IP, Perfecta16, 32, 32 LTE -T 32, Micra, CA-10 P, CA-6 P, CA-5 P, CA-4 P.

Modules: CA-64 PTSA, CA-10 E, ETHM-1 Plus, ETHM-2, GSM-X, GSM-X LTE, INT-ADR, INT-AV, INT-E, INT-FI, INT-GSM, INT-KNX-2, INT-O, INT-PP, INT-R, INT-RS Plus, INT-VG, INT-VMG, MST-1, ACCO-NT, ACCO-KP-PS, ACCO-KPWG-PS.

TELMOR:

Alarm control panels: TCA-824, TEX800

Documentation shows which devices can be installed in a given enclosure. It does not define how many different devices can be installed in one enclosure. Number of installed devices depends on their size and arrangement.

TECHNICAL DATA

External dimensions of enclosure:	W=350, H=452, D+D ₁ =100+8 [+/- 2mm]
External dimensions of flange:	W ₁ =385, H ₁ =430 [+/- 2mm]
Working depth:	D ₂ =80 [+/- 2 mm]
Space for battery:	17Ah/12 V Sealed Lead Acid (SLA)
Net/gross weight:	4,60 / 4,94 [kg]
Transformer:	without transformer - can be mounted in the casing: TRZ40, TRZ50, TRZ80
Operating conditions:	II environmental class, -10°C + 40°C
Material:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destinatio:	indoor
Tamper protection:	1 x microswitch: opening, 0,5 A@50 V DC max. NC - normally closed contacts
Closing:	screwed: washer screw M4x12 / option: lock MR008, MR027
Notes:	flush mounted, removable back mounting plate and front frame distance from the wall (mounting surface) – 8mm, additional back and side entry holes for cables. Ability to change direction of door opening (left/right).
Declarations, warranty:	CE, 2 years from production date