


CODE: **AWO200 v.2,0/V**
NAME: **17/TRP40/DSPR/L**

EN

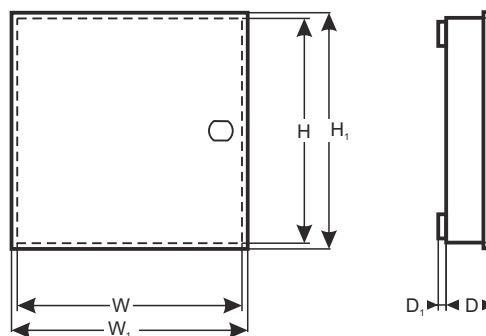

DESTINATION

DSC:

Power Series Neo

Alarm control panels: HS2016, HS2016-4, HS2032, HS2064, HS2128.

Modules: HSM2300, HSM2204, HSM2208, HSM2108, PCL-422.

Power Series

Alarm control panels: PC1832, PC1864.

Modules: PC5320, PC5100, PC5108, PC4216, PC5200, PC5204, PC5400, IT-100.

Power Series Pro

Alarm control panels: HS3032, HS3128, HS3248.

Modules: HSM3408, HSM2108, HSM3204CX, HSM3350, AMX-400.

Communication modules and transmitters: LE2080(R)/3G2080(R), TL280LE(R)/TL2803G, 3G2060(R) / TL2603G(R), LE2080(R)/TL280LE(R)E.

EBS:

Alarm control panels: PX 202A.

PARADOX:

Alarm control panels: SP65, SP4000, SP5500, SP6000, SP7000, EVO192.

Modules: ZX4, ZX8, ZX8SP, PGM4, HUB2.

PYRONIX:

Alarm control panels: MATRIX 424, MATRIX6, MATRIX816, MATRIX832, MATRIX832+.

RISCO:

Alarm control panels: PRO116, PRO128, PRO140.

Modules: RP512EZ16 ProSYS Plus.

ROGER:

Alarm control panels: PR402, CPR 32- SE.

SATEL:

Alarm control panels: Integra24, 32, 64, 64+, 128, 128+, 256+, Versa5, 10, 15 Plus, IP, Perfecta16, 32, 32 LTE -T 32, Micro, CA-10 P, CA-6 P, CA-5 P, CA-4 VP.

Modules: CA-64 PTSA, CA-10 E, ETHM-1 Plus, ETHM-2, GSM-X, GSM-X LTE, INT-ADR, INT-AV, INT-E, INT-FI, INT-GSM, INT-KNX-2, INT-O, INT-PP, INT-R, INT-RS Plus, INT-VG, INT-VMG, MST-1, ACCO-NT, ACCO-KP-PS, ACCO-KPWG-PS.

TELMOR:

Alarm control panels: TCA-824.

Modules: TEX800.

Documentation shows which devices can be installed in a given enclosure. It does not define how many different devices can be installed in one enclosure. Number of installed devices depends on their size and arrangement.

TECHNICAL DATA

External dimensions of enclosure: W=320, H=398, D+D₁=91+8 [+/-2 mm]

External dimensions of front panel: W₁=326, H₁=403 [+/-2 mm]

Battery space: 17Ah/12 V Sealed Lead Acid (SLA)

Weight net/gross: 3,550 / 3,825 [kg]

Transformer: TRP 40 VA/16 V/18 V in the case of PC/ABC in class UL94-V0, IP30

Power supply: 230 V AC (-15%/+10%), 50Hz, 200mA (max.)

Power supply output: U1=16 V AC or U2=18 V AC (-5%, +15%), I1=2,2 A or I2=2,0 A (max.)

Operating environment: Temperature: -10°C + +40°C relative humidity 20%...90%, without condensation

Material description: sheet steel DC01, thickness: 0,7mm, anticorrosion protection, color: RAL 9003

Destination: inside

Tamper protection: 1 x microswitch: enclosure opening 0,5 A; 50 V DC max. NC – normally closed contacts

Optionally: 1 x microswitch: detachment form wall, 0,5A; 50 V DC (required PKAZ066)

Closing: screwed: screw x 4

Notes: optional: lockable (MR008 or MR027), distance from wall (mounting surface) - 8mm

Declaration, warranty: CE, 2 years from production date