

DS-3E0518P-E/M
16 Port Gigabit Unmanaged POE Switch



- 16 × Gigabit PoE ports, 2 × Gigabit SFP fiber optical ports
- IEEE 802.3at/af standard
- IEEE 802.3, IEEE 802.3u, and IEEE 802.3x standard
- 6 KV surge protection for PoE ports
- PoE power management
- Gigabit network access
- Wire-speed forwarding
- Store-and-forward switching
- Solid high-strength metal shell


▪ Specification

Model		DS-3E0518P-E/M
Network Parameters	Ports	16 × Gigabit PoE ports, and 2 × Gigabit fiber optical ports
	Port Type	RJ45 port, full duplex, MDI/MDI-X adaptive
	Standard	IEEE 802.3, IEEE 802.3u, IEEE 802.3x
	Forwarding Mode	Store-and-forward switching
	MAC Address Table	8 K
	Switching Capacity	36 Gbps
	Packet Forwarding Rate	26.784 Mpps
	Internal Cache	4.1 Mbits
PoE Power Supply	PoE Standard	IEEE 802.3af, IEEE 802.3at
	PoE Power Pin	End-span: 1/2(-), 3/6(+)
	PoE Port	Ports 1 to 16
	Max. Port Power	30 W
	PoE Power Budget	125 W
General	Dimensions (W × H × D)	440 mm × 44 mm × 220.8 mm (17.3" × 1.7" × 8.7")
	Shell	Metal material
	Gross Weight	2.50 kg (5.51 lb)
	Net Weight	3.57 kg (7.87 lb)
	Operating Temperature	-10 °C to 55 °C (14 °F to 131 °F)
	Operating Humidity	5% to 95% (no condensation)
	Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
	Storage Humidity	5% to 95% (no condensation)
	Power Supply	100 to 240 VAC, 50/60 Hz, 2.5 A (Max)
	Power Consumption in Idle	25 W
Max. Power Consumption	150 W	
Approval	EMC	FCC (ANSI C63.4, 47 CFR PART 15B); CE-EMC/RCM (EN 55032: 2015+A11:2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1:2019, EN 50130-4:2011+A1:2014, EN 55035:2017+A11:2020); IC (ICES-003: Issue 12)
	Safety	UL (UL 62368-1); CB/RCM (IEC 62368-1:2014); CE-LVD (EN 62368-1:2014+A11:2022)
	Chemistry	CE-RoHS (2011/65/EU); WEEE (2012/19/EU); Reach (Regulation (EC) No 1907/2011)

▪ Available Model



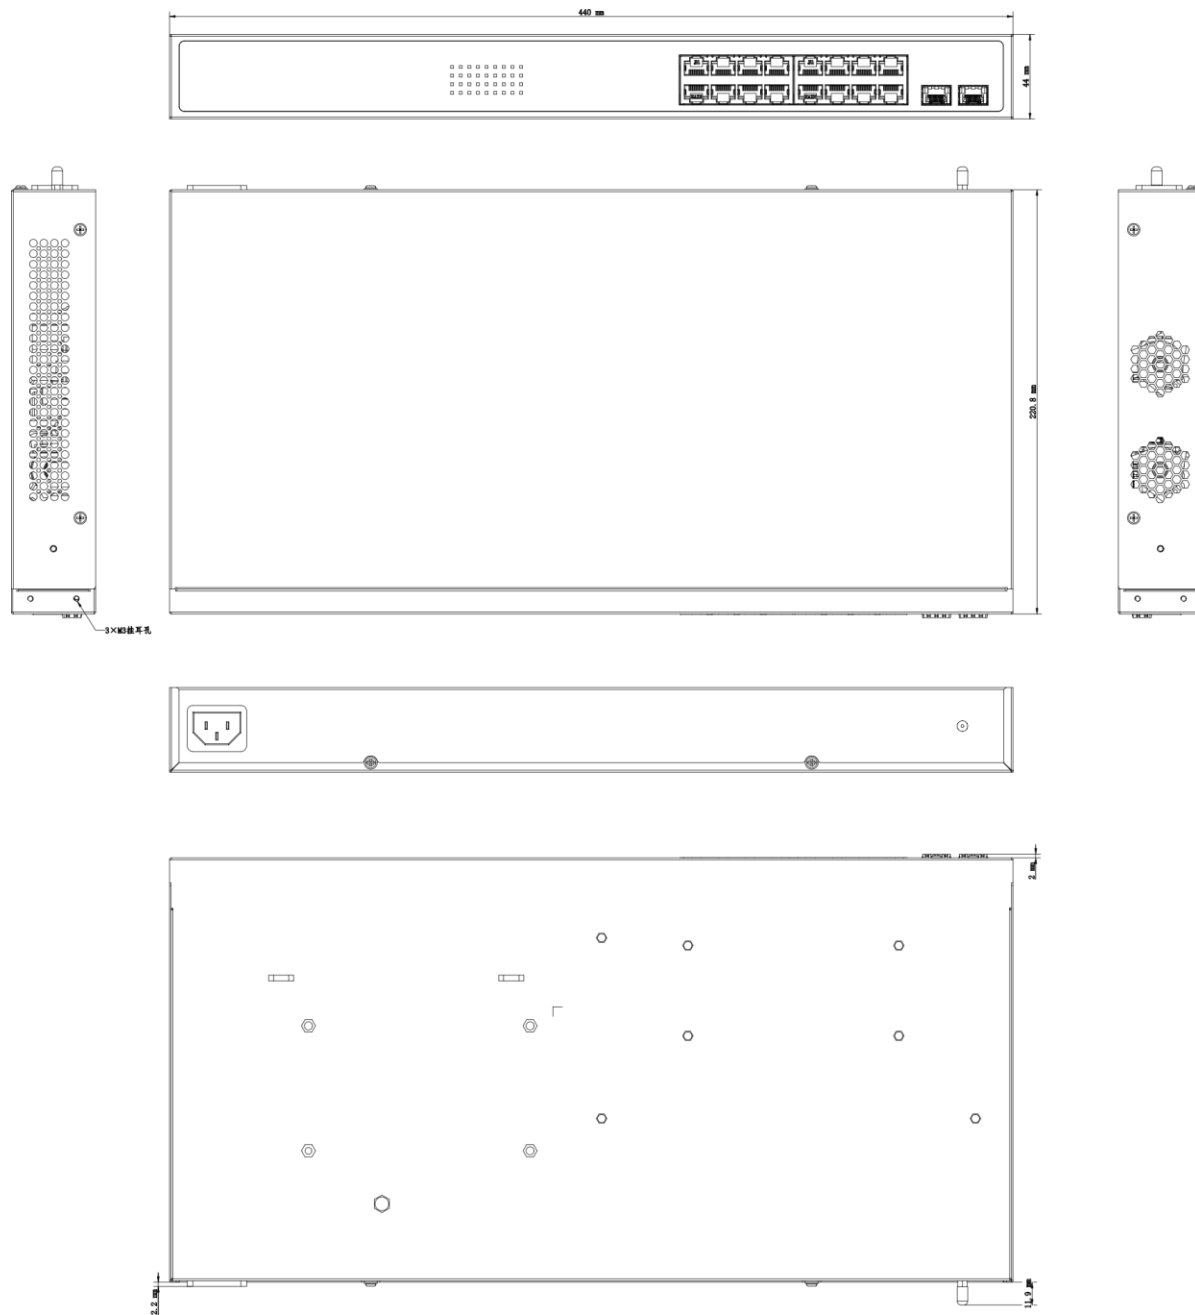

DS-3E0518P-E/M

▪ Dimension



▪ **Accessory**

▪ **Optional**

HK-SFP-1.25G-20-1 550 SFP Module	HK-SFP-1.25G-20-1 310 SFP Module	HK-SFP-1.25G-1310 -DF-MM SFP Module	HK-SFP-1.25G-20-1 310-DF SFP Module
			

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

