


CODE: **AWO353** v.1.2/III  
 NAME: **LCD/B SATEL**

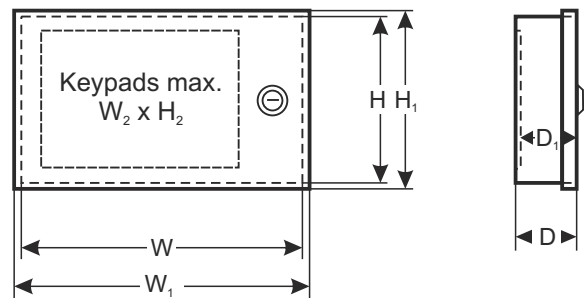

## DESTINATION

### SATEL

KEYPADS: CA-5 KLCD-L, CA-10 KLCD-L, CA-64 KLCD-L, INTEGRAKLCD (KLCD-R), CA-4V KLED, CA-6 KLED, CA 10 KLED, CA-64 S, CA-64 SZ, SZW-02

### PARADOX

KEYPADS: DIGIPLX DGP-641 LCD, DGP-610 LED, DGP-620 LED, SPECTRA 1686 V (696)

### GALAXY KEYPADS: MK-5 (CP-25)

VISONIC KEYPADS: KP-1002LCD, 1001/8LED, 1001/16LED

PYRONIX KEYPADS: MATRIX LCD FP 12610.

### CADDX NETWORKX

KEYPADS: NX-148E(LCD), NX-1348E (LCD- ikona), NX-108E, NX-116E, NX-124E (LED)

ROKONET KEYPADS: PROSYS LCD, RP 128 KLC

ELKRON KEYPADS: KP100D, KP100, KP200D, KP106

ADEMCO KEYPADS: AD6139

PIMA KEYPADS: RX-400

FBII KEYPADS: OMNIKPLCD

## TECHNICAL DATA

External dimensions of the enclosure:	W=215, H=150, D=50 [+/- 2mm]
External dimensions of the front panel:	W <sub>1</sub> =223, H <sub>1</sub> =155 [+/- 2mm]
Keyboard mounting dimensions:	W <sub>2</sub> =160, H <sub>2</sub> =145, D <sub>1</sub> =42 [+/- 2mm]
Weight net/gross:	0,85kg / 0,95kg [+/- 0,1kg]
Operating environment:	class II, -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5A@50 V DC max. NC- contacts
Closing:	lockable (various code, two keys included)
Notes:	removable back mounting plate
Declaration, warranty:	RoHS, 2 year from the production date